


### GRIPTOP™ – AMBER PURE GUM BELTING

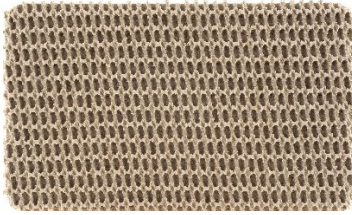

<b>Description:</b>	72"x3P PCB105 AMB PG RTxFS (S0)
<b>Product Number</b>	<ul style="list-style-type: none"> <li>24533404722 Belt Length 540' and Above</li> <li>24533404723 Belt Length 539' and Below</li> </ul>
<b>Product Construction</b>	Rough Top X Friction (Amber Pure Gum Rubber on Polyester/Cotton Fabric)
<b>Color</b>	Amber
<b>Compound Formulation</b>	Pure Gum Rubber
<b>Fabric</b>	Polyester/Cotton
<b>Nominal Overall Gauge</b>	0.300 ± 0.031 in (7.64 ± 0.8 mm)
<b>Nominal Weight</b>	1.10 ±10% lbs./ft <sup>2</sup> (5.37 ±10% kg/m <sup>2</sup> )
<b>Rated Working Tension</b>	105 lbs./inch (18 N/mm)
<b>Top Cover Surface</b>	Rough Top
<b>Bottom Cover Surface</b>	Friction
<b>Minimum Pulley Diameter</b>	4 in (101 mm)
<b>Temperature Range</b>	-30° to +180°F (-34° to +82°C)
<b>Cover Coefficient of Friction</b>	1.0 nominal Steel (1.0 nominal Cardboard)
<b>Bottom Coefficient of Friction</b>	0.30 max Steel (Cardboard 0.32 max)
<b>Available Width(s)</b>	72"
<b>Typical Applications</b>	<ul style="list-style-type: none"> <li>Incline/Impression</li> <li>Ideal for package handling on steep incline/decline angles up to 35°</li> </ul>
<b>Benefits</b>	<ul style="list-style-type: none"> <li>Softest cover of Griptop belts offering the most grab</li> <li>Non-marking show very good abrasion properties</li> <li>Resistant to tearing or gouging</li> </ul>

Phone: 800-543-8070

Email: [info@thermoid.com](mailto:info@thermoid.com)

[www.thermoid.com](http://www.thermoid.com)

/Thermoid is not responsible for possible errors in catalogues, brochures, websites and other materials, and may change such information without notice. HBD Thermoid reserves the right to modify its products without notice, including products already on order, as long as the modified product meets any agreed-upon specifications. All trademarks in this material are the property of the HBD Industries Inc., or its subsidiaries.