


GRIPTOP™ – AMBER PURE GUM BELTING

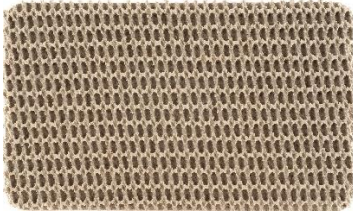

Description:	72"x3P PCB105 AMB PG RTxFS (S0)
Product Number	24533404722
Product Construction	Rough Top X Friction (Amber Pure Gum Rubber on Polyester/Cotton Fabric)
Color	Amber
Compound Formulation	Pure Gum Rubber
Fabric	Polyester/Cotton
Nominal Overall Gauge	0.300 ± 0.031 in (7.64 ± 0.8 mm)
Nominal Weight	1.10 ±10% lbs./ft ² (5.37 ±10% kg/m ²)
Rated Working Tension	105 lbs./inch (18 N/mm)
Top Cover Surface	Rough Top
Bottom Cover Surface	Friction
Minimum Pulley Diameter	4 in (101 mm)
Temperature Range	-30° to +180°F (-34° to +82°C)
Cover Coefficient of Friction	1.0 nominal Steel (1.0 nominal Cardboard)
Bottom Coefficient of Friction	0.30 max Steel (Cardboard 0.32 max)
Available Width(s)	72"
Typical Applications	<ul style="list-style-type: none"> • Incline/Impression • Ideal for package handling on steep incline/decline angles up to 35°
Benefits	<ul style="list-style-type: none"> • Softest cover of Griptop belts offering the most grab • Non-marking show very good abrasion properties • Resistant to tearing or gouging

Phone: 800-543-8070

Email: info@thermoid.com

www.thermoid.com

/Thermoid is not responsible for possible errors in catalogues, brochures, websites and other materials, and may change such information without notice. HBD Thermoid reserves the right to modify its products without notice, including products already on order, as long as the modified product meets any agreed-upon specifications. All trademarks in this material are the property of the HBD Industries Inc., or its subsidiaries.