


NITRILE – BLACK BELTING

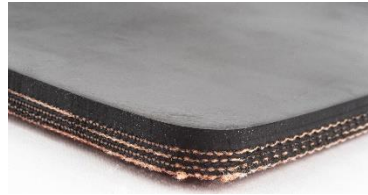

Description:	72"x4P PNT200 BLK NBR 3/32xTD (S15)
Product Number	24594034722
Product Construction	Smooth X Treated Duck (Black Nitrile on Polyester/Nylon Fabric)
Color	Black
Compound Formulation	Nitrile
Fabric	Polyester/Nylon
Nominal Overall Gauge	0.250 ± 0.031 in (6.4 ± 0.8 mm)
Nominal Weight	1.46 ±10% lbs./ft ² (7.13 ±10% kg/m ²)
Rated Working Tension	200 lbs./in (35 N/mm)
Top Cover Surface	Smooth
Bottom Cover Surface	Treated Duck
Minimum Pulley Diameter	4 in (102 mm)
Temperature Range	20° to +212°F (-7° to +100°C)
Cover Coefficient of Friction	NA Steel (NA Cardboard)
Bottom Coefficient of Friction	0.20 to 0.25 max Steel
Available Width(s)	72"
Typical Applications	<ul style="list-style-type: none"> • General Industrial • Good all-around properties for horizontal systems, particularly where oils are present • Treated duck offers low coefficient bottom
Benefits	<ul style="list-style-type: none"> • Smooth Nitrile cover finishes offer abrasion and chipping resistance, along with easy clean up • Polyester fabrics have low stretch, good fastener retention and are moisture resistant • Nitrile covers offer excellent oil resistance properties

Phone: 800-543-8070

Email: info@thermoid.com

www.thermoid.com

HBD/Thermoid is not responsible for possible errors in catalogues, brochures, websites and other materials, and may change such information without notice. HBD Thermoid reserves the right to modify its products without notice, including products already on order, as long as the modified product meets any agreed-upon specifications. All trademarks in this material are the property of the HBD Industries Inc., or its subsidiaries.